


Results of installation

Prior to installation the important mid-frequency (average of 500Hz, 1kHz and 2kHz bands) was measured at 3.85 seconds and the distribution is shown below.



Measurements taken after installation of the absorption showed a marked improvement in RT, with a mid-frequency value of 1.64 seconds, well below the BB93 criterion. This is illustrated in the post-installation distribution shown below which has axes to the same scale for ease of comparison.

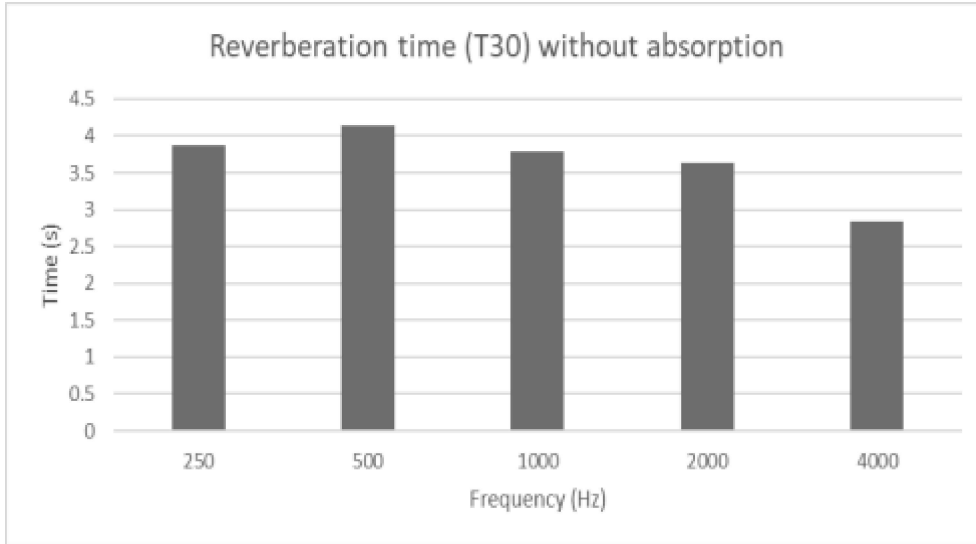